



Power Meter Monitor

Model: PMM0722

Document version: 1.1

Date: September 2021



Relay output 250VAC 2A module

KEY FEATURES

- Relay outputs 250VAC 2A
- 5000V system/field isolation
- Very compact size 55 X 82 mm
- DIN rail mounting
- IP54 protection degree
- Operating temperature: -20°C to +83°C

DESCRIPTION

PMM0722 is a two-channel relay output (250VAC/2A) module which transmits control signals from the CPU to the connected actuators.

PMM0722 has the ability to deliver 2A to the connected load which makes it highly useful and applicable in a wide range of industrial practices and processes.

TECHNICAL DATA


Number of contacts	2
Signal type	Voltage
Voltage signal type	250VAC
Output circuit design	changeover contactsRelays
Output characteristic	Potential-free
Output current per channel	2A
Switching frequency	0.1HZ
Isolation	5000V system/field
Operating temperature	-20°C to +83°C
Degree of protection	IP54

MECHANICAL DATA

Width	66.5mm (2.6")
Height	113mm (4.5")
Depth	6mm (0.23")
Wight	50 g
Mounting type	Din rail

BLOCK DIAGRAM

NUMBER	SIDE	DESCRIPTION
1	CPU	VCC
2	CPU	Signal
3	CPU	GND
4	FIELD	Normally closed
5	FIELD	Common
6	FIELD	Normally opened

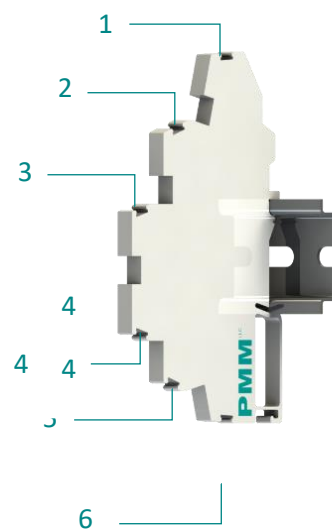

FIELD SIDE

